








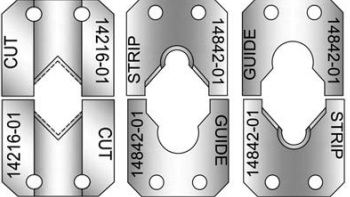













TOOLING AND REPLACEMENT PARTS FOR MODEL 4900-21/-22


Custom blades are made to a particular wire AWG and O.D. size. They are not adjustable for different wire sizes. Order one set of blades for each different wire or cable. These blades can only be made after we receive your wire samples. We must have wire/cable to measure for the blade dimensions and to test the blades after manufacture. Please send 20-30 feet of sample for each set of blades ordered. Wire samples are not normally needed for repeat orders. In reordering blades, please send re-order information from the blade identification tag.

COMPLETE BLADE SETS CUT AND STRIP	INDIVIDUAL STRIP BLADE SETS		APPLICATION <i>(All custom blades require 20-30 feet of wire/cable sample)</i>								
 <p>#16114-01</p>	 <p>#14217-01</p>	 <p>32-12 AWG Solid or Stranded BEST STRIP QUALITY</p>	<p>STANDARD STRIP BLADES V-TYPE SMALL WIRE</p> <p>Standard equipped blade for model 4900. To be used with all wires ranging from 32-12 AWG and a maximum O.D. of .210"</p>								
 <p>#16115-01</p>	 <p>#14231-01</p>	 <p>All Wires & Round Multi-Conductors HIGHEST STRIP QUALITY</p>	<p>CUSTOM RADIUS STRIP BLADES</p> <ul style="list-style-type: none"> • Teflon or rubbery insulated wires • Multi-conductor cable • Thin insulated wires • High precision stripping • Required on larger 10 AWG wires and some 32-28 AWG • High volume wires 								
 <p>#16116-01</p>	 <p>#15425-01</p>	 <p>Round Multi-Conductor BEST STRIP QUALITY</p>	<p>PARABOLIC STRIP BLADES</p> <p>A form of universal radius strip blades for stripping a range of multi-conductor cable sizes.</p> <ul style="list-style-type: none"> • Round multi-conductor cables 								
 <p>#16117-01</p>	 <p>#14822-01</p>	 <p>Out of Round Multi-Conductor HIGHEST STRIP QUALITY</p>	<p>CUSTOM RADIUS STRIP BLADES</p> <ul style="list-style-type: none"> • Out-of-round multi-conductor cables • Cat 5 & 6 cables • Twisted cables • Lumpy or inconsistent insulations 								
 <p>#16120-01</p>	 <p>#14862-01</p>	 <p>Parallel Conductor Flat Multi-Conductor BEST STRIP QUALITY</p>	<p>SQUARE STRIP BLADES</p> <ul style="list-style-type: none"> • Flat parallel conductor cables • Flat Multi-conductor cables • Ribbon cables 1/4" Max. width 								
 <p>#16118-01</p>	 <p>#14860-01</p>	 <p>Flat Multi-Conductor HIGHEST STRIP QUALITY</p>	<p>CUSTOM OVAL STRIP BLADES</p> <ul style="list-style-type: none"> • Flat Multi-conductor cables 								
 <p>#16121-01</p>	 <p>#14861-01</p>	 <p>Parallel Conductor HIGHEST STRIP QUALITY</p>	<p>CUSTOM PRECISION PARALLEL CONDUCTOR STRIP BLADES</p> <ul style="list-style-type: none"> • Parallel conductor wires up to 4 conductors and up to 1/4" max-width <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">Complete Blade Sets</td> <td style="width: 50%;">Individual Strip Blade Sets</td> </tr> <tr> <td>#16121-02 for 2 Conductor</td> <td>#14861-02 for 2 Conductor</td> </tr> <tr> <td>#16121-03 for 3 Conductor</td> <td>#14861-03 for 3 Conductor</td> </tr> <tr> <td>#16121-04 for 4 Conductor</td> <td>#14861-04 for 4 Conductor</td> </tr> </table>	Complete Blade Sets	Individual Strip Blade Sets	#16121-02 for 2 Conductor	#14861-02 for 2 Conductor	#16121-03 for 3 Conductor	#14861-03 for 3 Conductor	#16121-04 for 4 Conductor	#14861-04 for 4 Conductor
Complete Blade Sets	Individual Strip Blade Sets										
#16121-02 for 2 Conductor	#14861-02 for 2 Conductor										
#16121-03 for 3 Conductor	#14861-03 for 3 Conductor										
#16121-04 for 4 Conductor	#14861-04 for 4 Conductor										


TOOLING AND REPLACEMENT PARTS FOR MODEL 4900-21/-22

INDIVIDUAL CUT BLADE SETS

APPLICATION *(All custom blades require 20-30 feet of wire/cable sample)*




#14216-01




32-12 AWG Solid or Stranded

STANDARD SMALL WIRE CUT BLADES

- 32-12 AWG thin stranded or solid single conductor
- Multi-conductor cable
- Hose tubing
- Shrink tubing 1/4 max. width when flattened




#14858-01




12 & 8 AWG Stranded
12 & 10 AWG Solid
Round Multi-Conductor Cables

STANDARD LARGE WIRE CUT BLADES

- 10 AWG thin stranded conductor
- 12 & 10 AWG solid conductor
- Multi-conductor cable




#14863-01



Parallel-conductor
Flat multi-conductor

HEAVY-DUTY INCREASED THICKNESS CUT BLADES

- Parallel Conductor wires up to 1/4" wide
- Flat multiconductor cables up to 1/4" wide




#14518-01



32-12 AWG Solid or Stranded
For prolonged cutting life

HEAVY-DUTY CARBIDE CUT BLADES


- Can last up to 10X longer than standard steel blades when cutting copper

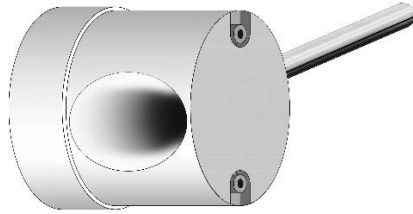

GUIDE TUBES

GUIDE TUBE NO.	MODEL 4900 GUIDE TUBES Internal Diameter	
	Inch	Metric
#17193-01	1/16"	1.5mm
#14769-01	1/8"	3.2mm
#14226-01	3/16"	4.8mm
#14714-01	1/4"	5.5mm
#14712-01	5/16"	7.9mm

CUSTOM OVAL GUIDE TUBE #17250-XX

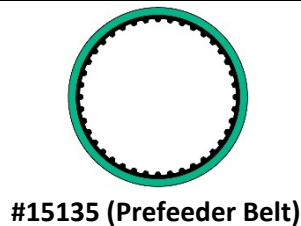


#15135 (Prefeeder Belt)



#15140 (4900 Belt)

The Green Drive Belts #15135 & 15140 have a unique Kevlar composition that offers the most extended wear life. It is best in general use for all wire and cable types. The 15135 belts are standard on all Eubanks belt drive Prefeeder

BELT SET NUMBERS		
BELT SET NO.	QUANTITY	WHERE USED
15140-06	6	AutoStrip and Prefeed
15140-04	4	AutoStrip
15135-02	2	Prefeeder



#13994 (Prefeeder Belt)



#14958 (4900 Belt)

The Red Drive Belts #13994 & 14958 are best for small delicate wires, ranging from 28-32 AWG. The soft Neoprene can help reduce any crinkle effects caused by the pitch of the pulleys. The Neoprene can grip better in certain wire insulations. The 14958 belts are standard on the model 4900.

BELT SET NUMBERS		
BELT SET NO.	QUANTITY	WHERE USED
14958-06	6	AutoStrip and Prefeed
14958-04	4	AutoStrip
13994-02	2	Prefeeder