























## TOOLING AND REPLACEMENT PARTS FOR MODEL 4900-21/-22

COMPLETE BLADE SETS CUT AND STRIP	INDIVIDUAL STRIP BLADE SETS		APPLICATION <i>(All custom blades require 20-30 feet of wire/cable sample)</i>		
 <b>#16114-01</b>	 <b>#14217-01</b>	 32-12 AWG Solid 32-10 AWG Stranded <b>BEST STRIP QUALITY</b>	<b>STANDARD STRIP BLADES V-TYPE SMALL WIRE</b>  Standard-equipped blade for model 4900. To be used with all wires ranging from 32-12 AWG Solid or 32-10 Stranded and a maximum OD of .250"		
 <b>#16115-01</b>	 <b>#14231-01</b>	 All Wires & Round Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM RADIUS STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Teflon or rubbery insulated wires</li> <li>• Multi-conductor cable</li> <li>• Thin insulated wires</li> <li>• High precision stripping</li> <li>• Required on larger 10 AWG wires and some 32-28 AWG</li> <li>• High volume wires</li> </ul>		
 <b>#16116-01</b>	 <b>#15425-01</b>	 Round Multi-Conductors <b>BEST STRIP QUALITY</b>	<b>PARABOLIC STRIP BLADES</b> A form of universal radius strip blades for stripping a range of multi-conductor cable sizes. <ul style="list-style-type: none"> <li>• Round Multi-conductor cables</li> </ul>		
 <b>#16117-01</b>	 <b>#14842-01</b>	 Out of Round Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM RADIUS STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Out-of-round multi-conductor cables</li> <li>• Cat 5 &amp; 6 cables</li> <li>• Twisted cables</li> <li>• Lumpy or inconsistent insulations</li> </ul>		
 <b>#16120-01</b>	 <b>#14862-01</b>	 Parallel-Conductors Flat Multi-Conductors <b>BEST STRIP QUALITY</b>	<b>SQUARE STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Flat Parallel conductor cables</li> <li>• Flat Multi-conductor cables</li> <li>• Ribbon cables 1/4" Max. Width</li> </ul>		
 <b>#16118-01</b>	 <b>#14860-01</b>	 Flat Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM OVAL STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Flat Multi-conductor cables</li> </ul>		
 <b>#16121-01</b>	 <b>#14861-01</b>	 Parallel Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM PRECISION PARALLEL CONDUCTOR STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Parallel conductor wires up to 4 conductors and up to 1/4" max-width</li> </ul> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; text-align: center;"> <b>Complete Blade Sets</b>            #16121-02 for 2 Conductor            #16121-03 for 3 Conductor            #16121-04 for 4 Conductor         </td> <td style="width: 50%; text-align: center;"> <b>Individual Strip Blade Sets</b>            #14861-02 for 2 Conductor            #14861-03 for 3 Conductor            #14861-04 for 4 Conductor         </td> </tr> </table>	<b>Complete Blade Sets</b> #16121-02 for 2 Conductor #16121-03 for 3 Conductor #16121-04 for 4 Conductor	<b>Individual Strip Blade Sets</b> #14861-02 for 2 Conductor #14861-03 for 3 Conductor #14861-04 for 4 Conductor
<b>Complete Blade Sets</b> #16121-02 for 2 Conductor #16121-03 for 3 Conductor #16121-04 for 4 Conductor	<b>Individual Strip Blade Sets</b> #14861-02 for 2 Conductor #14861-03 for 3 Conductor #14861-04 for 4 Conductor				

## TOOLING AND REPLACEMENT PARTS FOR MODEL 4900-21/-22

### INDIVIDUAL CUT BLADE SETS

### APPLICATION (All custom blades require 20-30 feet of wire/cable sample)




#14216-01




32-12 AWG Solid or Stranded

#### STANDARD SMALL WIRE CUT BLADES

- 32-12 AWG thin-stranded or single solid conductor
- Multi-conductor cable
- Hose tubing
- Shrink tubing 1/4 max. width when flattened




#14858-01




12 & 10 AWG Stranded  
12 & 10 AWG Solid  
Round Multi-Conductor Cables

#### STANDARD LARGE WIRE CUT BLADES

- 10 AWG thin-stranded conductor
- 12 & 10 AWG solid conductor
- Multi-conductor cable




#14863-01



Parallel-conductor  
Flat multi-conductor

#### HEAVY-DUTY INCREASED THICKNESS CUT BLADES

- Parallel Conductor wires up to 1/4" wide
- Flat multi-conductor cables up to 1/4" wide




#14518-01



32-12 AWG Solid or Stranded  
For prolonged cutting life

#### HEAVY-DUTY CARBIDE CUT BLADES


- Can last up to 10X longer than standard steel blades when cutting copper

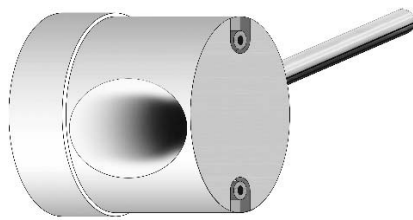


GUIDE TUBES

GUIDE TUBE NO.	MODEL 4900 GUIDE TUBES	
	Internal Diameter	
	Inch	Metric
#17193-01	1/16"	1.5mm
#14769-01	1/8"	3.2mm
#14226-01	3/16"	4.8mm
#14714-01	1/4"	5.5mm
#14712-01	5/16"	7.9mm

#### CUSTOM OVAL GUIDE TUBE #17250-XX




#15135-04  
(Prefeeder Belt)



#15140-04  
(4900 Belt)

The Green Drive Belts #15135-04 & 15140-04 have a unique Kevlar composition that offers the most extended wear life. It is best in general use for all wire and cable types. The 15135-04 belts are standard on all Eubanks belt drive Prefeeder

BELT SET NO.	BELT SET NUMBERS	
	QUANTITY	WHERE USED
15140-04	4	AutoStrip
15135-04	4	Prefeeder



#13994-04  
(Prefeeder Belt)



#14958-04  
(4900 Belt)

The Red Drive Belts #13994-04 & 14958-04 are best for small delicate wires, ranging from 28-32 AWG. The soft Neoprene can help reduce any crinkle effects caused by the pitch of the pulleys. The Neoprene can grip better in certain wire insulations. The 14958-04 belts are standard on the model 4900.

BELT SET NO.	BELT SET NUMBERS	
	QUANTITY	WHERE USED
14958-04	4	AutoStrip
13994-04	4	Prefeeder