











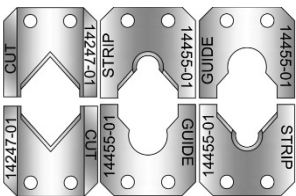














## TOOLING AND REPLACEMENT PARTS FOR MODEL 8900-01/-02

COMPLETE BLADE SETS CUT AND STRIP	INDIVIDUAL STRIP BLADE SETS		APPLICATION <i>(All custom blades require 20-30 feet of wire/cable sample)</i>		
 <b>#16122-01</b>	 <b>#14252-01</b>	 32-12 AWG. Solid or Stranded <b>BEST STRIP QUALITY</b>	<b>STANDARD STRIP BLADES V-TYPE SMALL WIRE</b>  Standard-equipped blade for model 8900. To be used with all wires ranging from 32-12 AWG and a maximum OD of .200"		
 <b>#16128-01</b>	 <b>#14248-01</b>	 <b>ALL WIRES</b> <b>BEST STRIP QUALITY</b>	<b>CUSTOM RADIUS STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Teflon or rubbery insulated wires</li> <li>• Multi-conductor cable</li> <li>• Thin insulated wires</li> <li>• High precision stripping</li> <li>• Required on larger 10-4 AWG wires and some 32-28 AWG.</li> <li>• High-volume wires</li> </ul>		
 <b>#16124-01</b>	 <b>#14992-01</b>	 All Wires & Round Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM RADIUS STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Teflon or Rubberly insulated wires</li> <li>• Round Multi-conductor cable</li> <li>• Thin insulated wires and round cables</li> <li>• High precision stripping</li> <li>• Required on larger 10-4 AWG wires and Some 32-28 AWG.</li> <li>• High-volume wires</li> </ul>		
 <b>#16125-XX</b>	 <b>#14993-XX</b>	 Round Multi-Conductors <b>BEST STRIP QUALITY</b>	<b>PARABOLIC STRIP BLADES</b> <ul style="list-style-type: none"> <li>• A form of universal radius strip blades, intended for stripping a selected range of round multi-conductor cable sizes</li> </ul> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; text-align: center;"> <b>Complete Blade Sets</b>            #16125-01 for .100"-.250" O.D.            #16125-02 for .200"-.350" O.D.            #16125-03 for .300"-.450" O.D.         </td> <td style="width: 50%; text-align: center;"> <b>Individual Strip Blade Sets</b>            #14993-01 for .100"-.250" O.D.            #14993-02 for .200"-.350" O.D.            #14993-03 for .300"-.450" O.D.         </td> </tr> </table>	<b>Complete Blade Sets</b> #16125-01 for .100"-.250" O.D. #16125-02 for .200"-.350" O.D. #16125-03 for .300"-.450" O.D.	<b>Individual Strip Blade Sets</b> #14993-01 for .100"-.250" O.D. #14993-02 for .200"-.350" O.D. #14993-03 for .300"-.450" O.D.
<b>Complete Blade Sets</b> #16125-01 for .100"-.250" O.D. #16125-02 for .200"-.350" O.D. #16125-03 for .300"-.450" O.D.	<b>Individual Strip Blade Sets</b> #14993-01 for .100"-.250" O.D. #14993-02 for .200"-.350" O.D. #14993-03 for .300"-.450" O.D.				
 <b>#16127-01</b>	 <b>#14455-01</b>	 Out of Round Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM CABLE FORMING PRECISION RADIUS STRIP BLADES</b> Temporarily forms out-of-round cables, to execute strip. <ul style="list-style-type: none"> <li>• Out-of-round multi-conductor cables</li> <li>• CAT-5 &amp; 6 Internet Cables</li> </ul>		
 <b>#16129-01</b>	 <b>#14570-01</b>	 <b>BEST STRIP QUALITY</b>	<b>SQUARE STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Flat parallel conductor cables</li> <li>• Flat Multi-Conductor Cables</li> <li>• Ribbon Cables up to 9/16" (14mm) max. width</li> </ul>		
 <b>#16130-01</b>	 <b>#14488-01</b>	 Flat Multi-Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM RADIUS STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Flat Multi-Conductor Cable up to (Telephone Cable, Flat Power Cord) 9/16" (14mm) max. width</li> </ul>		
 <b>#16131-XX</b>	 <b>#14606-XX</b>	 Parallel Conductors <b>HIGHEST STRIP QUALITY</b>	<b>CUSTOM PRECISION PARALLEL CONDUCTOR STRIP BLADES</b> <ul style="list-style-type: none"> <li>• Parallel conductor wires up to 6 conductors up to 9/16" (14mm) max. width</li> </ul> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; text-align: center;"> <b>Complete Blade Sets</b>            #16131-02 for 2 Conductor            #16131-03 for 3 Conductor            #16131-04 for 4 Conductor            #16131-05 for 5 Conductor            #16131-06 for 6 Conductor         </td> <td style="width: 50%; text-align: center;"> <b>Individual Strip Blade Sets</b>            #14606-02 for 2 Conductor            #14606-03 for 3 Conductor            #14606-04 for 4 Conductor            #14606-05 for 5 Conductor            #14606-06 for 6 Conductor         </td> </tr> </table>	<b>Complete Blade Sets</b> #16131-02 for 2 Conductor #16131-03 for 3 Conductor #16131-04 for 4 Conductor #16131-05 for 5 Conductor #16131-06 for 6 Conductor	<b>Individual Strip Blade Sets</b> #14606-02 for 2 Conductor #14606-03 for 3 Conductor #14606-04 for 4 Conductor #14606-05 for 5 Conductor #14606-06 for 6 Conductor
<b>Complete Blade Sets</b> #16131-02 for 2 Conductor #16131-03 for 3 Conductor #16131-04 for 4 Conductor #16131-05 for 5 Conductor #16131-06 for 6 Conductor	<b>Individual Strip Blade Sets</b> #14606-02 for 2 Conductor #14606-03 for 3 Conductor #14606-04 for 4 Conductor #14606-05 for 5 Conductor #14606-06 for 6 Conductor				


## TOOLING AND REPLACEMENT PARTS FOR MODEL 8900-01/-02

### INDIVIDUAL CUT BLADE SETS

### APPLICATION (All custom blades require 20-30 feet of wire/cable sample)




#14251-01



32-12 AWG Solid or Stranded

#### STANDARD SMALL WIRE CUT BLADES

- For single-stranded or soled conductor wires, ranging from .000" to .250" Outer Diameter




#14247-01




10-4 AWG Stranded & Round Multi-Conductor Cables

#### STANDARD LARGE WIRE CUT BLADES

- For single-stranded conductor wires, ranging from .250" to .562" Outer Diameter
- Larger power cables & multi-conductor cables




#14515-01



10-4 AWG Stranded & Round Multi-Conductor Cables

#### HEAVY-DUTY INCREASED THICKNESS CUT BLADES

- Larger wires from 8-2 A.W.G.
- Larger multi-conductor cables, from .250" - .562" in O.D.



#14518-01




Up to .045" Soft plastic-coated steel rope


32-12 AWG Solid or Stranded  
FOR PROLONGED CUTTING LIFE

#### HEAVY-DUTY CARBIDE CUT BLADES

- For cutting small soft plastic-coated steel rope  
Up to .040" **STEEL CUTTING ONLY FOR LOW VOLUMES**
- Can last up to 10X longer than standard steel blades when cutting copper




#14580-01



Parallel Conductors  
Flat Multi-Conductor


#### SQUARE CUT BLADES

- Flat multi-conductor cables

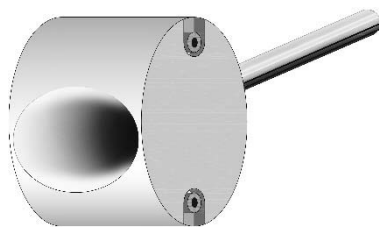


GUIDE TUBES

A Deflector Plate is required when doing strip lengths three inches and longer



GUIDE TUBE NO.	Internal Diameter		DEFLECTOR PLATE NO.
	Inch	Metric	
#17195-01	1/16"	1.5mm	#14462-11
#14603-01	1/8"	3.2mm	#14462-18
#14334-01	3/16"	4.8mm	#14462-11
#15058-01	1/4"	5.5mm	#14462-16
#14335-01	5/16"	7.9mm	#14462-12
#15064-01	3/8"	9.5mm	#14462-17
#14333-01	7/16"	11.1mm	#14462-13
#15057-01	1/2"	12.7mm	#14462-19
#14339-01	9/16"	14.3mm	#14462-14
#14489-01	39/64"	15.5mm	#14462-15


#### CUSTOM OVAL GUIDE TUBE #17250-XX



#15135-04

The Green Drive Belts No. 15135-04 are the 8900's standard belts. The special Kevlar composition offers the longest wear life. It is best in general use for all wire and cable types. The 15135 belts are also standard on all Eubanks belt drive Prefeeders


BELT SET NUMBERS		
BELT SET NO.	QUANTITY	WHERE USED
15135-04	4	AutoStrip Prefeed



#13994-04

The Red Drive Belts #13994-04 are best for small delicate wires, ranging from 28-32 AWG. The soft Neoprene can help reduce any crinkle effects caused by the pitch of the pulleys. The Neoprene can grip better in certain wire insulations.

BELT SET NUMBERS		
BELT SET NO.	QUANTITY	WHERE USED
13994-04	4	AutoStrip Prefeed



#13410-04

The Blue Drive Belts #13410-04 are best for large wires or cables, with tough-to-strip insulations. The 13410 belts are made of soft high friction rubber. The soft rubber wraps around the circumference of the cable, thus providing a maximum contact surface.

BELT SET NUMBERS		
BELT SET NO.	QUANTITY	WHERE USED
13410-04	4	AutoStrip