


TOOLING AND REPLACEMENT PARTS FOR MODEL 8000-21/-22

Custom blades are made to a particular wire AWG and O.D. size. They are not adjustable for different wire sizes. Order one set of blades for each different wire or cable. These blades can only be made after we receive your wire samples. We must have wire/cable to measure for the blade dimensions and to test the blades after manufacture. Please send 20-30 feet of sample for each set of blades ordered. Wire samples are not normally needed for repeat orders. In reordering blades, please send re-order information from the blade identification tag.


COMPLETE BLADE SETS CUT AND STRIP

INDIVIDUAL STRIP BLADE SETS


APPLICATION *(All custom blades require 20-30 feet of wire/cable sample)*



#16122-01




#14252-01



32-12 AWG
Solid or Stranded
BEST STRIP QUALITY

STANDARD STRIP BLADES V-TYPE SMALL WIRE

Standard equipped blade for model 8000. To be used with all wires ranging from 32-12 AWG and a maximum O.D. of .200"



#16128-01




#14248-01



ALL WIRES
BEST STRIP QUALITY

CUSTOM RADIUS STRIP BLADES


- Teflon or rubbery insulated wires
- Multi-conductor cable
- Thin insulated wires
- High precision stripping
- Required on larger 10-4 AWG wires and some 32-28 AWG
- High volume wires



#16124-01




#14992-01



All Wires &
Round Multi-Conductors
HIGHEST STRIP QUALITY

CUSTOM RADIUS STRIP BLADES

- Teflon or Rubberly insulated wires
- Round Multi-conductor cable
- Thin insulated wires and round cables
- High precision stripping
- Required on larger 10-4 AWG wires and Some 32-28 AWG
- High volume wires



#16125-XX



#14993-XX



Round Multi-Conductors
BEST STRIP QUALITY

PARABOLIC STRIP BLADES


- A form of universal radius strip blades, intended for stripping a selected range of round multi-conductor cable sizes

Complete Blade Sets


#16125-01 for .100"-.250" O.D.
#16125-02 for .200"-.350" O.D.
#16125-03 for .300"-.450" O.D.

Individual Strip Blade Sets

#14993-01 for .100"-.250" O.D.
#14993-02 for .200"-.350" O.D.
#14993-03 for .300"-.450" O.D.



#16127-01




#14455-01




Out of Round
Multi-Conductors
HIGHEST STRIP QUALITY

CUSTOM CABLE FORMING PRECISION RADIUS STRIP BLADES Temporarily forms out out-of-round cables, to execute strip.


- Out of round multi-conductor cables
- CAT-5 & 6 Internet Cables



#16129-01




#14570-01




BEST STRIP QUALITY

SQUARE STRIP BLADES

- Flat parallel conductor cables
- Flat Multi-Conductor Cables
- Ribbon Cables up to 9/16" (14mm) max. width



#16130-01




#14488-01




Flat Multi-Conductors
HIGHEST STRIP QUALITY

CUSTOM RADIUS STRIP BLADES

- Flat Multi-Conductor Cable up to (Telephone Cable, Flat Power Cord) 9/16" (14mm) max. width



#16131-XX



#14606-XX



Parallel Conductors
HIGHEST STRIP QUALITY

CUSTOM PRECISION PARALLEL CONDUCTOR STRIP BLADES

- Parallel conductor wires up to 6 conductors up to 9/16" (14mm) max. width

Complete Blade Sets

#16131-02 for 2 Conductor
#16131-03 for 3 Conductor
#16131-04 for 4 Conductor
#16131-05 for 5 Conductor
#16131-06 for 6 Conductor


Individual Strip Blade Sets

#14606-02 for 2 Conductor
#14606-03 for 3 Conductor
#14606-04 for 4 Conductor
#14606-05 for 5 Conductor
#14606-06 for 6 Conductor

TOOLING AND REPLACEMENT PARTS FOR MODEL 8000-21/-22

INDIVIDUAL CUT BLADE SETS

APPLICATION (All custom blades require 20-30 feet of wire/cable sample)




#14251-01



32-12 AWG Solid or Stranded

STANDARD SMALL WIRE CUT BLADES

- For single-stranded or soled conductor wires, ranging from .000" to .250" Outer Diameter




#14247-01



10-4 AWG Stranded & Round Multi-Conductor Cables

STANDARD LARGE WIRE CUT BLADES

- For single-stranded conductor wires, ranging from .250" to .562" Outer Diameter
- Larger power cables & multi-conductor cables




#14515-01



10-4 AWG Stranded & Round Multi-Conductor Cables

HEAVY-DUTY INCREASED THICKNESS CUT BLADES

- Larger wires from 8-4 AWG
- Larger multi-conductor cables, from .250" - .562" in O.D.



#14518-01




Up to .045" Soft plastic-coated steel rope




32-12 AWG Solid or Stranded
FOR PROLONGED CUTTING LIFE

HEAVY-DUTY CARBIDE CUT BLADES

- For cutting small soft plastic-coated steel rope
Up to .040" **STEEL CUTTING ONLY FOR LOW VOLUMES**
- Can last up to 10X longer than standard steel blades when cutting copper




#14580-01



Parallel Conductors
Flat Multi-Conductor


SQUARE CUT BLADES

- Out of round multi-conductor cables

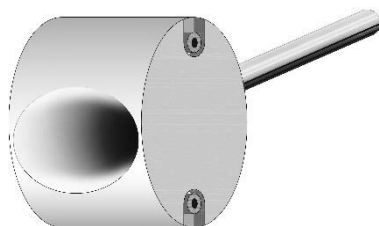

GUIDE TUBES


A Deflector Plate is required when doing strip lengths three inches and longer



MODEL 8000 GUIDE TUBES

GUIDE TUBE NO.	Internal Diameter		DEFLECTOR PLATE NO.
	Inch	Metric	
#17195-01	1/16"	1.5mm	#14462-11
#14603-01	1/8"	3.2mm	#14462-18
#14334-01	3/16"	4.8mm	#14462-11
#15058-01	1/4"	5.5mm	#14462-16
#14335-01	5/16"	7.9mm	#14462-12
#15064-01	3/8"	9.5mm	#14462-17
#14333-01	7/16"	11.1mm	#14462-13
#15057-01	1/2"	12.7mm	#14462-19
#14339-01	9/16"	14.3mm	#14462-14
#14489-01	39/64"	15.5mm	#14462-15

CUSTOM OVAL GUIDE TUBE #17250-XX




#15135

The Green Drive Belts No. 15135 are the 8000's standard belts. The special Kevlar composition offers the longest wear life. It is best in general use for all wire and cable types. The 15135 belts are also the standard on all Eubanks belt drive Prefeeder

BELT SET NUMBERS

BELT SET NO.	QUANTITY	WHERE USED
15135-06	6	AutoStrip and Prefeed
15135-04	4	AutoStrip
15135-02	2	Prefeed




#13994

The Red Drive Belts #13994 are best for small delicate wires, ranging from 28-32 AWG. The soft Neoprene can help reduce any crinkle effects caused by the pitch of the pulleys. The Neoprene can grip better in certain wire insulations.

BELT SET NUMBERS

BELT SET NO.	QUANTITY	WHERE USED
13994-06	6	AutoStrip and Prefeed
13994-04	4	AutoStrip
13994-02	2	Prefeed



#13410

The Blue Drive Belts #13410 are best for large wires or cables, with tough to strip insulations. The 13410 belts, are made of soft high friction rubber. The soft rubber wraps around the circumference of the cable, thus providing a maximum contact surface.

BELT SET NUMBERS

BELT SET NO.	QUANTITY	WHERE USED
13410-06	6	AutoStrip and Prefeed
13410-04	4	AutoStrip
13410-02	2	Prefeed